
SERVO-DRIVE.CZ

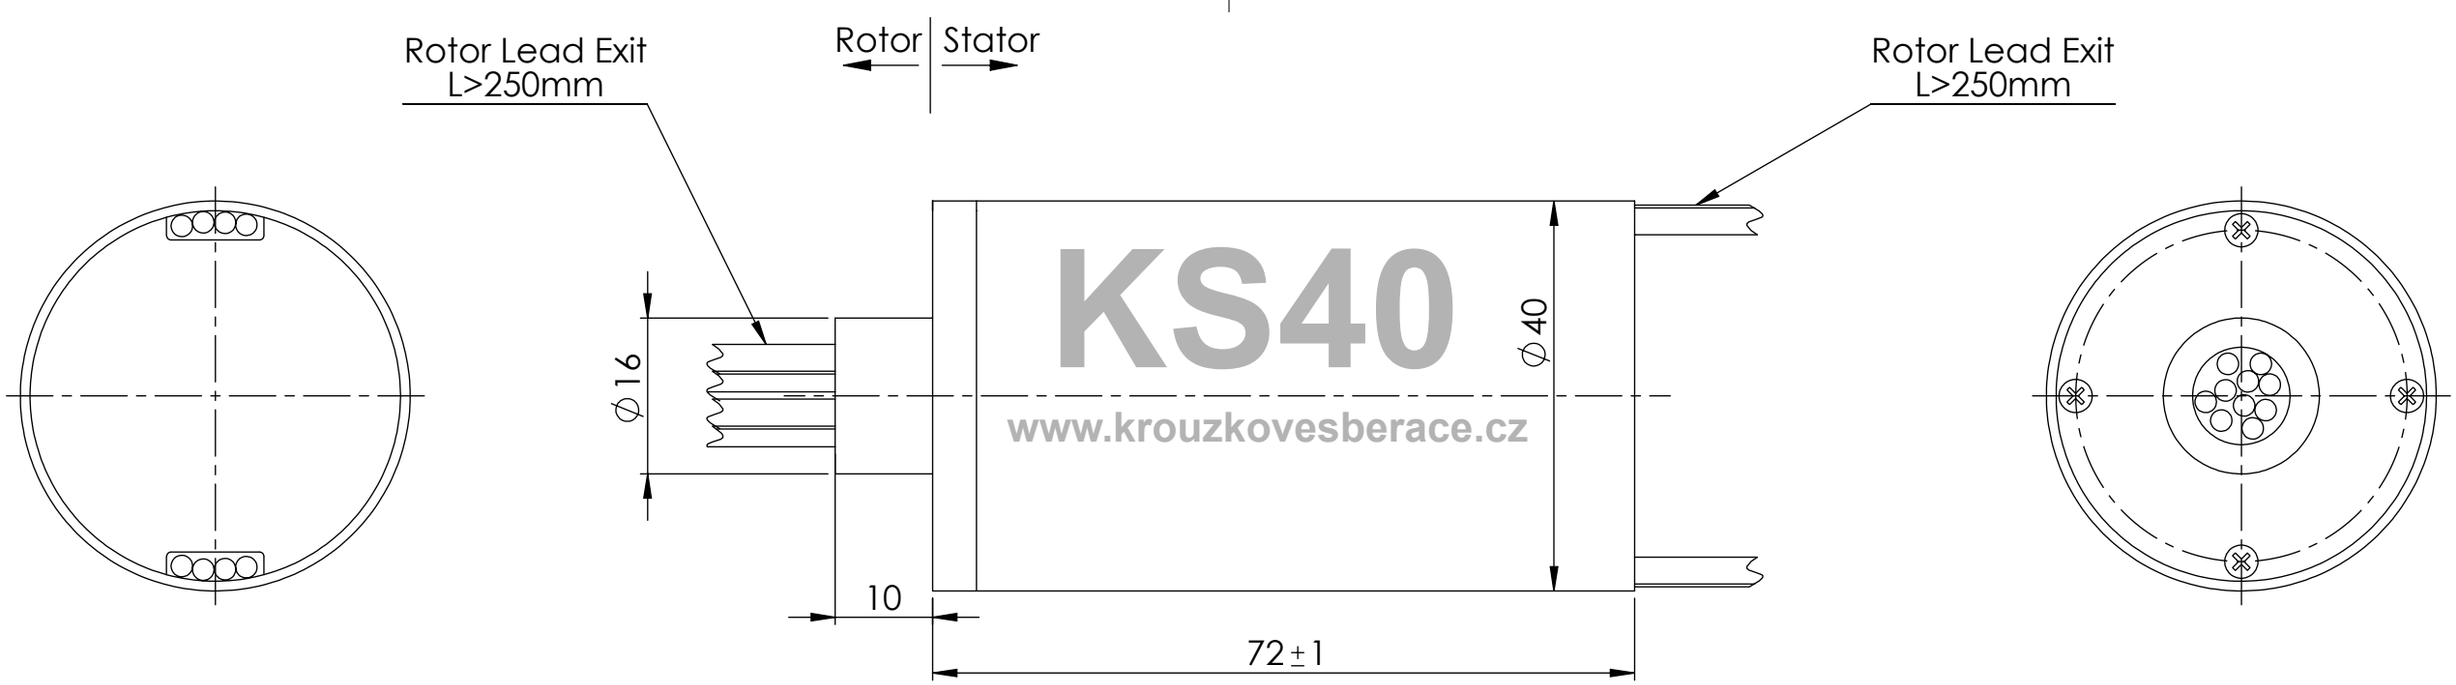

Voltage	400Vac/400Vdc
Current	14A
Circuits	8
Contact material	precious metals
Leads	Silver plated
Leads (AWG)	16
Dielectric strength	500VAC@60Hz,60s
Insulation resistance	≥1000MΩ/500Vdc
Dynamic contact resistance	<100mΩ @6Vdc 50mA 5RPM
Operating Speed	400rpm
Temperature	-20℃ ~ +80℃
Housing material	Engineering plastic
Shaft material	Engineering plastic
Protection degree	IP51
Estimated life	10^8 revs
Bearings	steel ball bearings

Version	Änderung / Modification Description	Dwg. No. V35138	KS40–8x14A
		SERVO-DRIVE.CZ	
		Die oben genannten Bemaßungen sind Richtwerte. Alle Abmessungen in mm / All dimensions in mm	Date : 21.01.2016 Author : P. UHER | Version : 1.0 Update : xx.xx.xxxx

SERVO-DRIVE.CZ